

Para instrucciones en Español, llamar al: 1-800-233-5921



Best for Baby™

OWNER'S MANUAL

Discovery™ 5

Rear-facing Child Restraint

Child Requirements

Weight: 5 to 22 lbs (2.3 to 10 kg)

Height: 19 to 29 inches (48 to 74 cm)

⚠ WARNING

To reduce the risk of
SERIOUS INJURY or
DEATH, read this owner's
manual prior to installing
and using this child
restraint.

More children are killed every year as passengers in car crashes than by any other type of injury. To reduce the risk of **SERIOUS INJURY** or **DEATH**, read this owner's manual and your vehicle owner's manual before installing and using this child restraint. Using a child restraint makes a big difference. By properly using this child restraint and following these instructions (and the instructions that accompany your vehicle), you will greatly reduce the risk of serious injury or death to your child from a crash. Do not be misled by the commonly used term "safety seat"; no restraint system can prevent all injuries in all crashes. Many properly restrained adults and children are injured in motor vehicle crashes, including relatively minor crashes. A properly used child restraint is the best way to minimize injuries to your child and to increase the chances for your child's survival in most crashes.

Table of Contents

Warnings	1
Safe Practices	4
Airplane Usage	5
Recall Information	5
Know Your Vehicle	6
Know Your Child Restraint	6
Using Your Discovery™ Child Carrier/Restraint	8
Changing the Harness Position	10
Changing the Crotch Strap Position	12
Securing Your Child in the Child Restraint	13
Removing Your Child from the Child Restraint	14
Installing and Using the Convenience Base	15
Releasing the Child Restraint from the Base	17
Installing the Convenience Base with the LATCH	18
Removing the LATCH System	20
Installing the Child Restraint Without the Base	21
Using the Locking Clip	23
Using as an Infant Carrier	25
Canopy Installation	26
Care Instructions	26
Replacement Parts	27
Limited Warranty	28

• **IMPORTANT** •

This child restraint meets all the requirements of Federal Motor Vehicle Safety Standard 213. No child restraint can guarantee absolute protection from injury in every crash.

This child restraint is designed for use **ONLY** in the rear-facing position by children who weigh between 5 and 22 lbs (2.3 kg and 10 kg) and whose height is between 19 and 29 inches (48 to 74 cm).

NEVER use this child restraint in the forward-facing position.

Rear-facing Use ONLY

Weight: 5 – 22 lbs (2.3 – 10 kg)

Height: 19 – 29 inches (48 – 74 cm)

⚠ WARNING

Failure to follow installation instructions can result in your child striking the vehicle's interior during a sudden stop or crash. Serious injury or death may result. These instructions and the instructions in your vehicle owner's manual must be followed carefully. If there is a conflict between the two, the vehicle owner's manual regarding child restraint installation must be followed.

Premature Infants

- **DO NOT** use this or any other child restraint with a premature infant until after consulting your doctor. Premature infants may have difficulty breathing when in a sitting position.

Air Bag Warnings

- **DO NOT** use this restraint in the front seat of a vehicle equipped with an active air bag. Interaction between a rear facing restraint and air bags may cause serious injury or death. If your vehicle has an air bag, refer to the vehicle owner's manual for child restraint installation.
- If the rear seat of your vehicle is equipped with side air bags: **Vehicles built prior to the 2002 model year:** **DO NOT** use this restraint in a vehicle seating position equipped with a side air bag unless authorized by the vehicle manufacturer.
Model year 2002 and newer vehicles: Refer to your vehicle owner's manual before placing this restraint in a seating position equipped with a side air bag. Do not place any objects between the restraint and the side air bag, as an expanding air bag may cause the items to strike your child.

WARNING

Location Warnings

- According to accident statistics, children are safer when properly restrained in rear seating positions than in front seating positions. Generally, the center rear is safest and should be used if available. Children under 13 should ride in the back seat of the vehicle.
- **NEVER** use this child restraint in the forward-facing position. Serious injury or death can result.
- Use this child restraint on forward-facing vehicle seats. **DO NOT** use on vehicle seats which face the rear or side.
- **ONLY** use this child restraint on vehicle seats with backs that lock into place.
- If you are unable to use the center rear seating position, and have to install this child restraint directly behind a front vehicle seat, ensure that there is at least 1 1/2 in. (38 mm) of space between any part of the child restraint and the vehicle seat that is closest to the child's head. This space may be necessary for the child restraint to properly perform in certain types of crashes.
- Some child restraints do not fit all vehicles or all seating locations. There are many thousands of combinations of vehicle makes, models, child restraint configurations, seat belt designs and seat cushion shapes. The easiest way to determine whether your child restraint is suitable for a particular seating position is to check for a tight installation. If the child restraint can not be properly installed, **DO NOT** use the child restraint. Consult vehicle owner's manual, try a different seating location or call Evenflo at 1-800-233-5921.

Seat Belt Warnings

- **DO NOT** use this child restraint in a vehicle with door-mounted seat belts.
- **DO NOT** use this child restraint in a seating position that has seat belts that automatically move along the frame of the vehicle when the door is opened. These seat belts will not hold a child restraint properly.
- Use only with vehicle seat belts that can be pulled tight and stay locked.
- **DO NOT** use this child restraint if it moves more than 1 in. (25 mm) forward or side-to-side at the seat belt path. Serious injury or death may occur. Move the child restraint to another seating location.
- If the vehicle seat belts are not routed and fastened correctly, the child restraint may not protect your child in a crash.
- Remove locking clip from vehicle seat belt when not used with a child restraint, or the vehicle seat belt will not properly restrain an adult or child. Serious injury could occur.

WARNING

- When using with **LAP BELTS ONLY: DO NOT** use this child restraint in a vehicle equipped with lap belts that only lock during a sudden stop or crash (emergency locking retractors). You must use a seating position with a locking lap belt. Check your vehicle owner's manual to see if you have emergency locking retractors.
- Be sure that the release button of the vehicle seat belt does not contact a side or edge of the child restraint. This could cause the vehicle seat belt to accidentally release. If your particular seat belt allows the buckle to fall into a questionable location, turn the buckle upside down so the push button faces away from the child restraint or use another seating position.

LATCH Warnings

- **ONLY** use for securing child restraint to lower LATCH anchor points.
- **ALWAYS** read and follow exactly the instructions which accompany your vehicle and child restraint.
- **NEVER** attach two hooks to one vehicle lower anchor point.
- **DO NOT** use the vehicle seat belts to install a child restraint when using the LATCH system.
- This LATCH system is intended to be used **ONLY** as described in these instructions. Serious injury or death may result from misuse.
- When not in use, the LATCH harness and hook should be securely stored in the storage area located in the child restraint base. Keep out of reach of children.
- **DO NOT** use this child restraint if it moves more than 1 in. (25 mm) forward or side-to-side at the LATCH harness path. Serious injury or death may occur. Move the child restraint to another seating location.
- **ALWAYS** be sure that the LATCH hook is fully engaged onto the LATCH anchor point by pulling hard on the LATCH harness. If it is not totally engaged, the LATCH system will not secure your child restraint. Serious injury or death may result.

Usage Warnings

- **DO NOT** loosen the vehicle seat belt to provide more leg room as this will prevent the child restraint from protecting your infant.
- The headrest on the vehicle seat that the child faces should be placed in the lowest position. The vehicle seat back that the child faces must be fully padded and free of any hard objects.

WARNING

- **ALWAYS** check the restraint and buckle for hot surfaces before putting a child into the restraint. Your child could be burned.
- **NEVER** leave child unattended.
- **NEVER** place this child restraint on beds, sofas, or other soft surfaces. The child restraint can roll over on soft surfaces and suffocate the child.
- This child restraint system, even when unoccupied, **MUST** be firmly secured with a vehicle seat belt/LATCH at all times, as specified in these instructions. An unsecured child restraint may injure other occupants in a crash.
- **NEVER** leave the child in this child restraint when the harness straps are loose or undone. A child may strangle when straps are loose or undone.
- **NEVER** place this child restraint near the edges of counter tops, tables, or other high surfaces. The child's movements can cause the child restraint to slide and fall.
- Fold-down armrests could pose a hazard to a rear-facing child in certain types of collisions. Consult your vehicle owner's manual before installing any rear-facing child restraint in front of a fold-down armrest.
- In cold weather, **DO NOT** dress the child in bulky clothing like snowsuits if the child is riding in a child restraint. Bulky coats/snowsuits make it difficult to properly tighten the harness to the child, which may allow the child to be ejected from the restraint during a crash.

Additional Warnings

- **DO NOT** use this child restraint if it is broken, damaged or missing parts.
- **DO NOT** use this child restraint if it has been involved in an accident. It must be replaced.
- **DO NOT** attach additional padding, toys or other devices not made by Evenflo or described in these instructions to the child restraint. Items not tested with the child restraint could injure the child.
- Be sure that the handle is firmly locked in the carry position before lifting the child restraint.

Safe Practices

- **Everyone rides buckled up or the vehicle does not go.** Make no exceptions for adults or children. If someone unbuckles, stop the vehicle. Being firm and consistent right from the start will mean fewer discipline problems as children get older. Besides, an unrestrained child or adult can be thrown into and injure other passengers.
- **NEVER** take a baby out of a child restraint for comforting while the vehicle is moving.

- **NEVER** try to tend to a crying baby's needs while driving.
- **DO NOT** allow a child to have objects such as lollipops or ice cream on a stick. The object can injure the child if the vehicle swerves or hits a bump.
- **DO NOT** feed an infant who is riding in a child restraint.
- Anything loose can be deadly in a crash. Put sharp or heavy items in the trunk.
- Always place handle in the car or stand position before removing infant from carrier.
- **DO NOT** dress the child in blanket sleepers or other clothing that would prevent the crotch strap from fitting snugly up against the child.
- In hot, sunny weather cover the child restraint with a light colored blanket when you leave the vehicle. Always check the child restraint and buckle for hot surfaces before putting child into the restraint.
- In cold weather a child may need an extra blanket for warmth. Secure the child in the child restraint and cover both the child and the restraint with a blanket.

Airplane Usage

This restraint meets FAA Inversion requirements for airplane use. Airplane installation is the same as vehicle installation. Turn the top of the airplane seat belt buckle away from the restraint for easy release and removal.

Tip!

Check with your airline before departure to make sure this child restraint meets their requirements.

Recall Information

- Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, the restraint's model number, and manufacturing date to Evenflo Company, Inc., 1801 Commerce Dr., Piqua, OH 45356 or call 1-800-233-5921. You may also register on-line at: <https://plweb.evenflo.com/productreg.aspx>
- For recall information call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY:1-800-424-9153), or go to: <http://www.NHTSA.gov>



For future reference, record the model number of your child restraint AND the date of manufacture below.

Model Number: _____

Date of Manufacture: _____


Know Your Vehicle

Your vehicle components may appear significantly different than pictured. Consult your vehicle Owner's Manual to help identify your vehicle components.

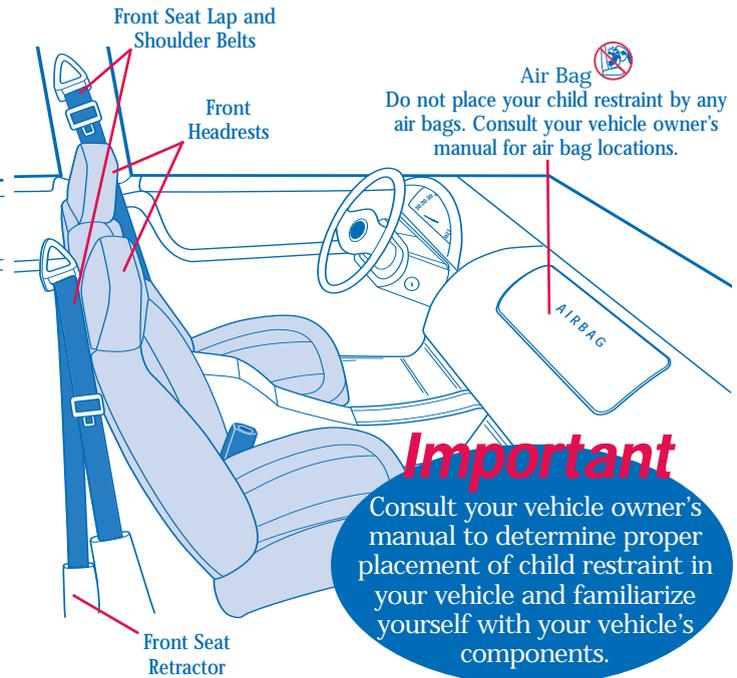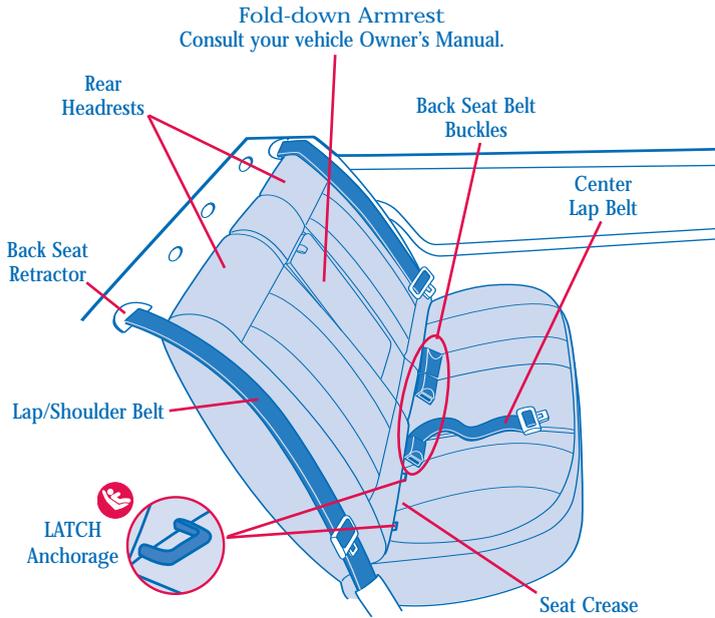


Know Your Child Restraint

Front View

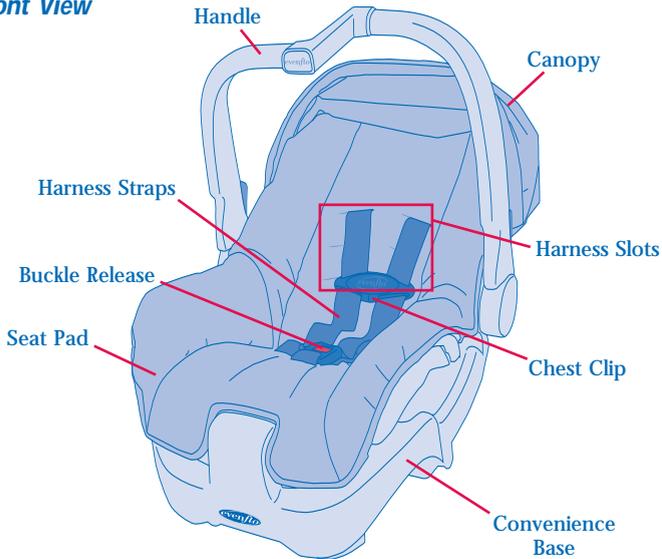

6

Back View

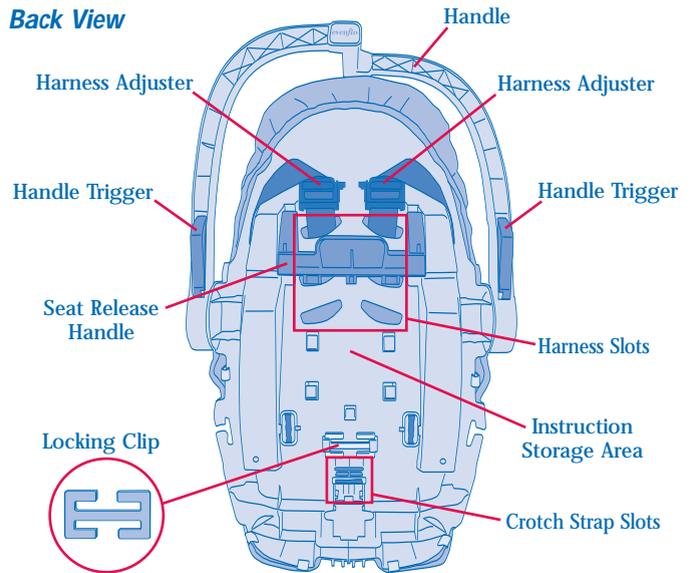

7

Using Your Discovery™ Child Carrier/Restraint

Child Requirements

Weight: 5 to 22 lbs (2.3 to 10 kg)

Height: 19 to 29 inches (48 to 74 cm)



! WARNING


Child's head **MUST** be at least 1 inch (25mm) below the top of the carrier.

1. **Secure the child in the child carrier.**
 - Harness straps **MUST** start as close as possible, but **NEVER** above, the child's shoulders (page 13).
 - The harness **MUST** be on the child's shoulders and snug with no more than two finger-widths of space between the child and the harness strap.
 - Chest clip is securely fastened and at armpit level.
 - Buckle tongues are fully engaged.
 - Crotch strap fits easily between baby's legs.
 - Back and bottom of baby should rest flat against the seat shell.
2. **If you have the convenience base, secure it to the vehicle seat (page 15).**
3. **If you have the convenience base, place the child carrier, with child secured in it, into the base (page 16).**
4. **If you don't have the convenience base, secure the child restraint to the vehicle seat (page 21).**
 - Install locking clip, if necessary (page 23).
 - Towel rolled up and placed beneath the base, if necessary (page 22).
5. **Check your work.**
 - The child restraint **MUST NOT** move more than 1 in. (25 mm) forward or side-to-side.
 - Make sure the child's back and bottom are flat against the back and bottom surfaces of the child restraint.
 - Harness straps are as close as, but not above shoulder level.
 - Buckle tongues are fully engaged.
 - Make sure the level arrow is level with ground.

Changing the Harness Position


As your child grows, you will need to change the harness strap position so that the harness straps are routed through the slots closest to the child's shoulders. The shoulder harness straps should **ALWAYS** be as close as possible to, but **NEVER** above, the child's shoulders.

1

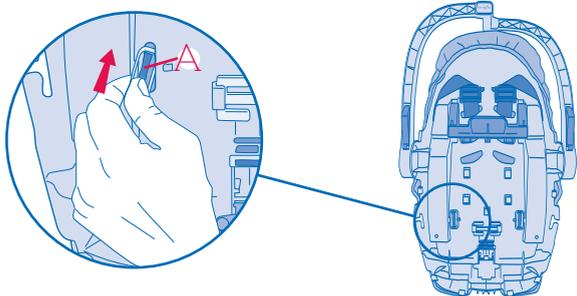


Push the harness anchor **A** located on the back of the child restraint through the slot to the front of the seat shell. Repeat this procedure on both sides.

2

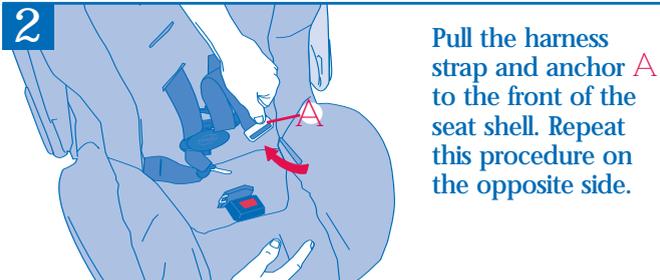


Pull the harness strap and anchor **A** to the front of the seat shell. Repeat this procedure on the opposite side.

3

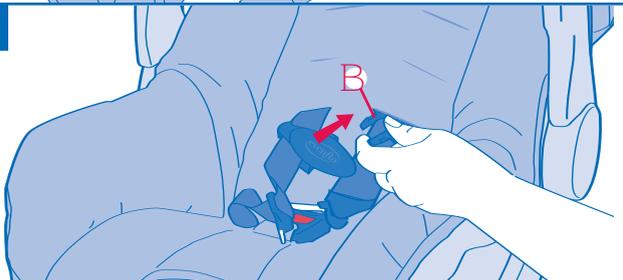


Pull the harness strap from the back of the carrier while pushing the chest clip **B**, buckle tongue, harness anchor and harness strap through to the back.

4

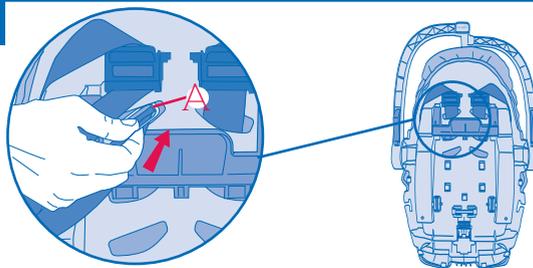


Choose the appropriate slots for the new harness position. Push the harness anchor **A**, buckle tongue, and harness strap and chest clip through to the front of the child restraint. Repeat for the other harness strap. NOTE: Harness strap should start at or below the child's shoulders.

5

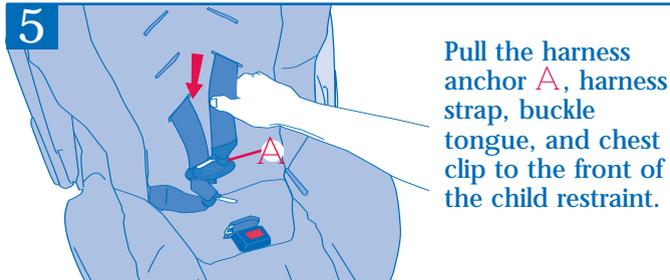


Pull the harness anchor **A**, harness strap, buckle tongue, and chest clip to the front of the child restraint.

6

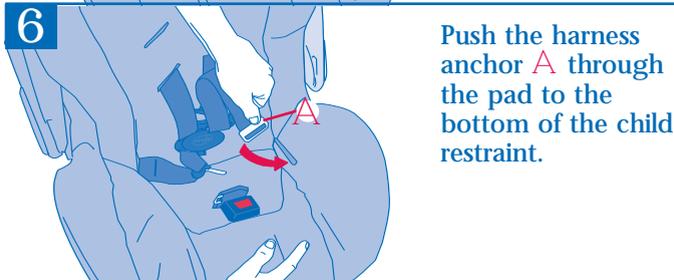

Push the harness anchor **A** through the pad to the bottom of the child restraint.

7

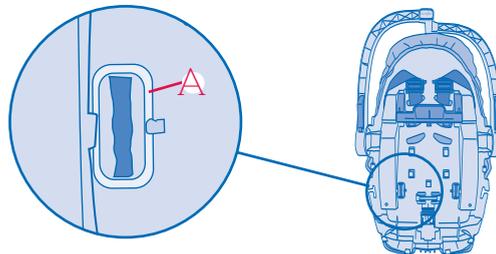


Pull the harness anchor **A** through the bottom of the child restraint, and clip into place. Repeat on the opposite side.

Changing the Crotch Strap Position


As your child grows, you will need to change the crotch strap position so that it is in the slot closest to your child. The crotch strap should **ALWAYS** be as close as possible to, but **NEVER** under, the child's bottom.

1

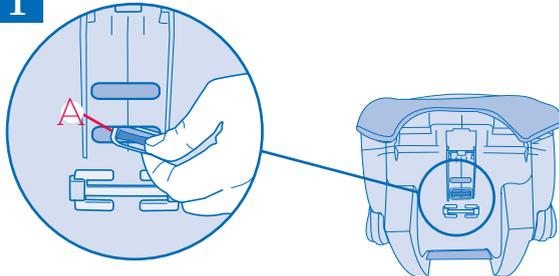


To reposition the crotch strap, turn the harness anchor **A** on the end of the crotch strap sideways and push it through the slot in the restraint seat.

2

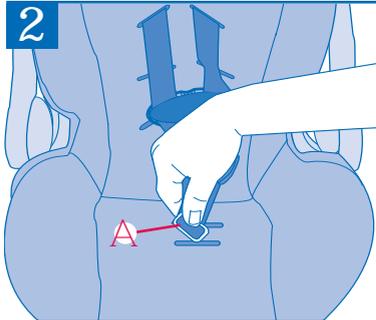

Insert the crotch strap anchor **A** into the slot that is closest to the child **AND** the most comfortable for the child.

3

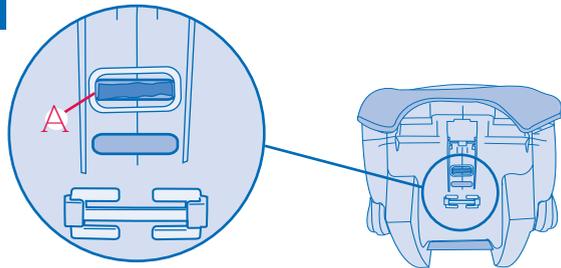


Make certain the harness anchor **A** is properly seated against the seat shell.

Securing Your Child in the Child Restraint




1

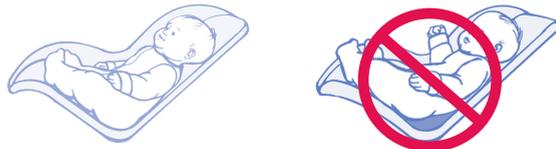

Dress your infant in clothing with legs. The harness must pass between the baby's legs, clothing with legs allows a better fit. Do not use a sack sleeper or a bulky blanket. Place your infant 5 to 22 lbs (2.3 to 10 kg), 19 to 29 inches (48 to 74 cm) in the restraint. Baby's back and bottom should be flat against the seat. If you leave a gap, baby will not be comfortable.

2

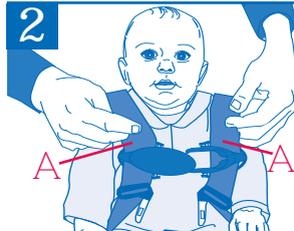


Slide each harness strap **A** over the child's shoulders.



Insert the buckle tongues **B** into the buckle. Pull up on the harness strap to ensure the buckle tongues are engaged.

3

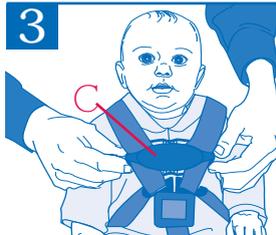


Align the two sides of the chest clip **C** and snap them together. The chest clip must be positioned at armpit level.



The harness straps must be snug against the child. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position. Check the harness straps near the shoulders for slack and adjust as needed.


4

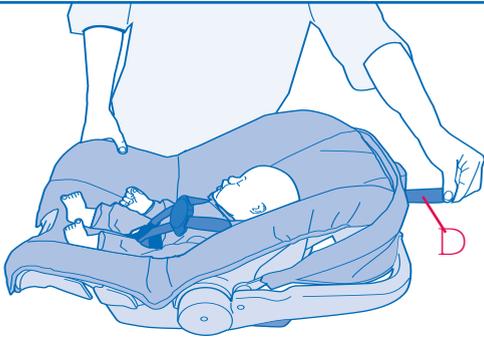


Tighten the harnesses by pulling on the harness straps **D** from the back of the harness adjusters.

Removing Your Child from the Child Restraint

1




Press the red buckle release **A**, and remove the buckle tongues.

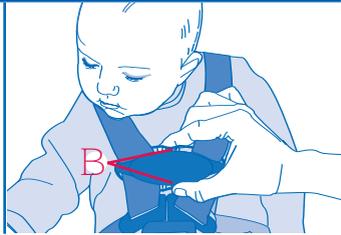

To unfasten the chest clip, squeeze the tabs **B** together and pull the clip apart.

2

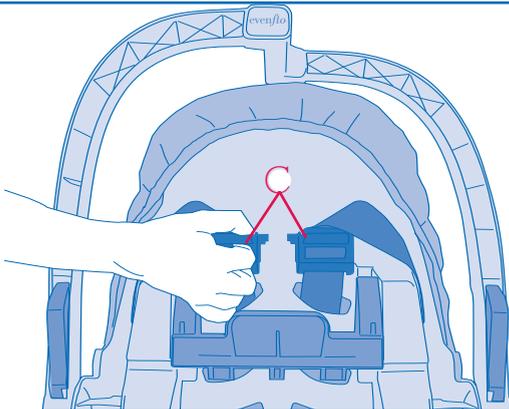

To loosen the harness straps, squeeze the harness adjusters **C** while pulling on the straps from the front of the seat.


Installing and Using the Convenience Base



• IMPORTANT •

- Be sure that the release button of the vehicle seat belt does not contact a side or edge of the child restraint. This could cause the vehicle seat belt to accidentally release. If your particular seat belt allows the buckle to fall into a questionable location, turn the buckle upside down so the push button faces away from the child restraint or use another seating position.
- The child restraint **MUST** be locked firmly into the base. Check by lifting up on the child restraint.
- **NEVER** use this child restraint in the **forward-facing** position.


1

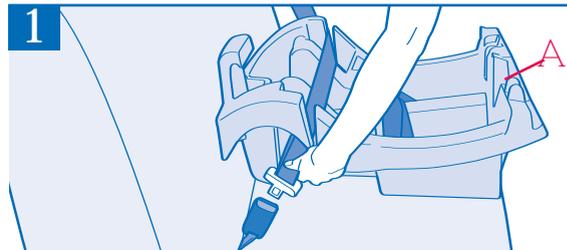


Secure the base **A** to your vehicle seat by routing the vehicle seat belt through the openings on the sides of the base. You may also let the vehicle shoulder belt fall against the vehicle seat back. Be sure that the vehicle shoulder belt does not lie inside any portion of the convenience base.

2

LAP BELT

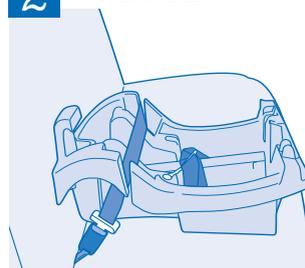


LAP AND SHOULDER BELT

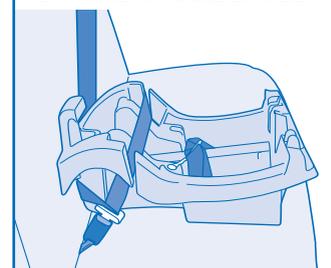

NOTE: In vehicles with a lap and shoulder belt **and** a **free-sliding buckle tongue**, you **MUST** install with the locking clip. See “Using the Locking Clip” on page 23.

3

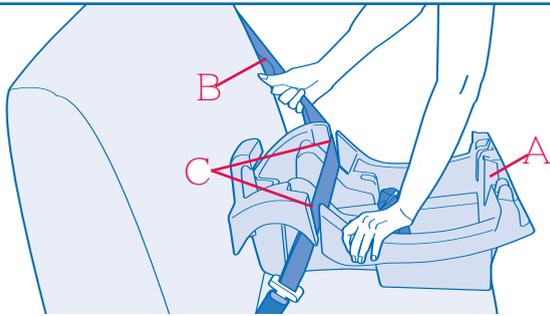


⚠ WARNING

DO NOT use this child restraint if it moves more than 1 in. (25 mm) forward or side-to-side at the seat belt path. Serious injury or death may occur. Move the child restraint to another seating location, or try to tighten the seat belt again.


Pull the vehicle seat belt **B** tight as possible, while pushing down on the base **A** with your full weight. Check to be sure the base is secure and stable by moving the base from side to side at the belt path **C**. **This child restraint should not move more than 1 inch (25 mm) forward or side-to-side at the belt path. If it does, try to tighten it again or move the child restraint to another location.**

4

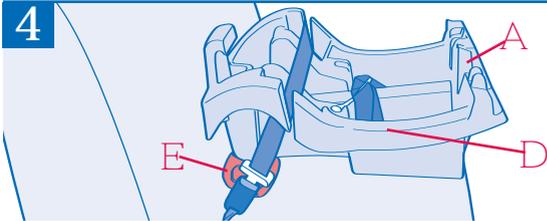

If level line **D** is not level to vehicle floor, use a tightly rolled towel or small blanket **F** underneath the front edge of the base **A**, in order to provide enough recline for an infant's head to lie back comfortably.


5

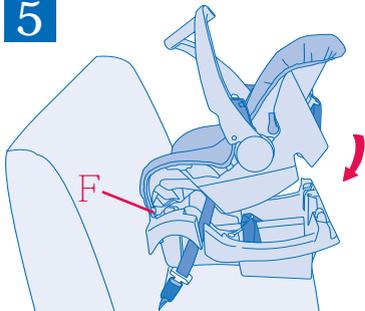

Secure the infant restraint to the base by placing the front of the seat under the hook **F** and snapping into place.

16

6

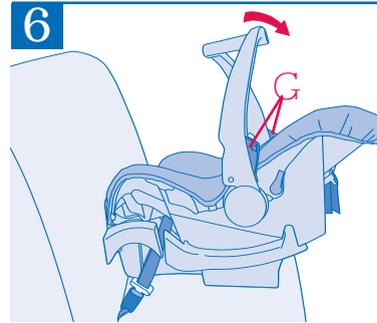


TIP!
You may rotate the handle to the farthest position behind the restraint for more room in small vehicles.

Rotate the handle to the down position by pressing on the red handle triggers **G** located on each side of the child restraint. Move the handle back until it locks into place behind the child restraint. Place the child in the restraint and secure.

Releasing the Child Restraint from the Base


1

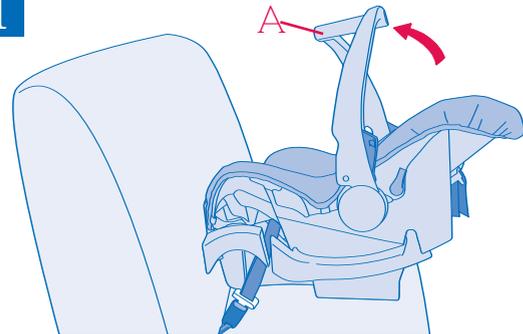

Move the handle **A** to the up position by pressing the handle triggers and rotating the handle until it locks into place above the child restraint.

2

Pull the red base release lever **B** on the back of the child restraint outward, and lift the child restraint out.

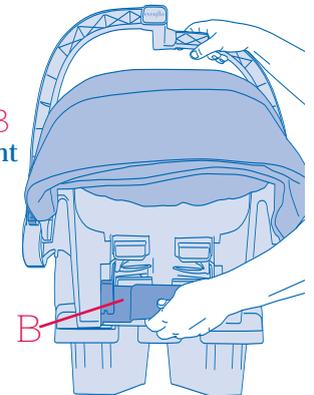

17





Installing the Convenience Base with the LATCH

LATCH is a new system for attaching the child restraint to your vehicle seat. It is to be used in place of your vehicle's seat belts, and can only be used in vehicles with LATCH anchors. Your vehicle owners manual may refer to this system as ISOFIX.


⚠ WARNING

- **ONLY** use for securing child restraint to lower LATCH anchor points.
- **ALWAYS** read and follow exactly the instructions which accompany your vehicle and child restraint.
- **NEVER** attach two hooks to one vehicle lower anchor point.
- **DO NOT** use the vehicle seat belts to install a child restraint when using the LATCH system.
- **NEVER** use this child restraint in the forward-facing position.
- This LATCH system is intended to be used **ONLY** as described in these instructions. Serious injury or death may result from misuse.
- When not in use, the LATCH harness and hook should be securely stored in the storage area located in the child restraint base. Keep out of reach of children.
- **ALWAYS** be sure that the LATCH hook is fully engaged onto the LATCH anchor point by pulling hard on the LATCH harness. If it is not totally engaged, the LATCH system will not secure your child restraint. Serious injury or death may result.


Know Your LATCH

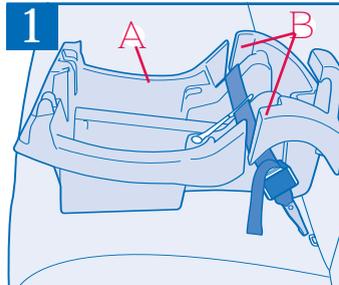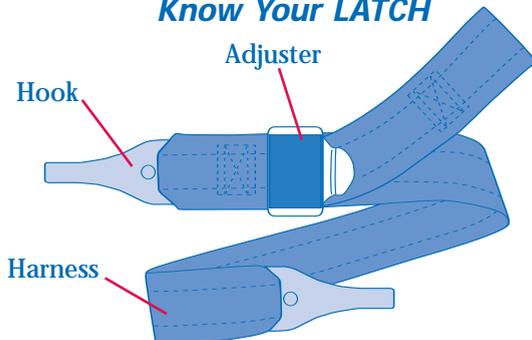

Place the base **A** on the vehicle.
Route the LATCH harness and hook through the LATCH harness openings and under the tabs **B**.

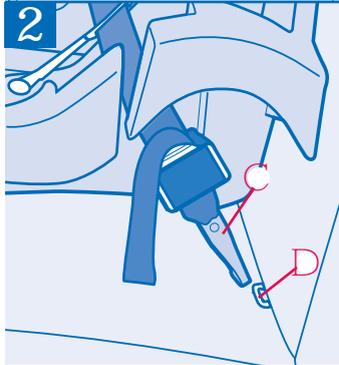

Refer to your owner's manual to locate the lower anchors on your vehicle seat.
Attach the right hook **C** to the right anchor **D**, and the left hook to the left anchor. **DOUBLE CHECK** that the hooks are fully engaged by pulling hard on the LATCH harness.

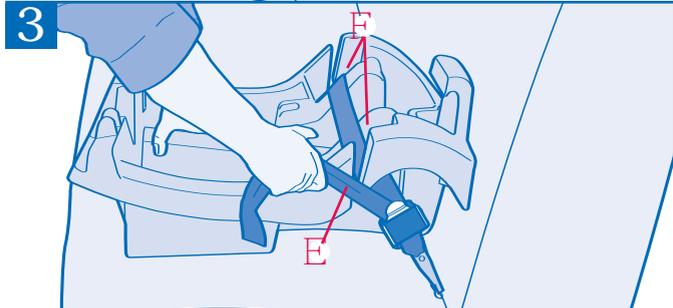

⚠ WARNING


DO NOT use this child restraint if it moves more than 1 inch (25 mm) forward or side-to-side at the seat belt path. Serious injury or death may occur. Move the child restraint to another seating location, or try to tighten the seat belt again.

Using your full weight, push the base firmly into the vehicle seat, while pulling up on the strap **E** to tighten. Make sure the LATCH harness is tight. If you can move the child restraint more than 1 inch (25 mm) forward or side-to-side at the harness path **F**, the harness is not tight enough. You will need to try again, or find another location for your child restraint.




Removing the LATCH System

1

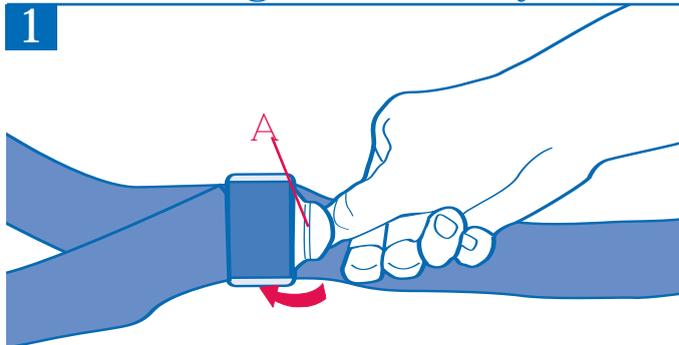


Tilt and slide the adjuster **A** to loosen.

2

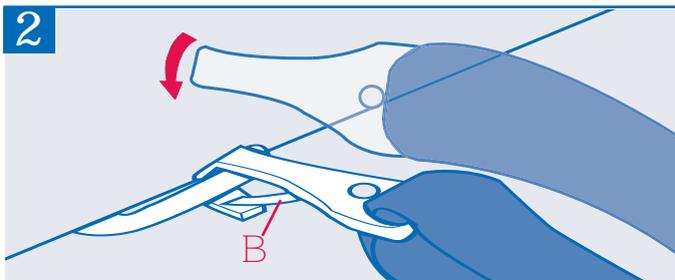

Press the tab **B** on the hook. Press hook in and twist to release. Repeat on other side.

3

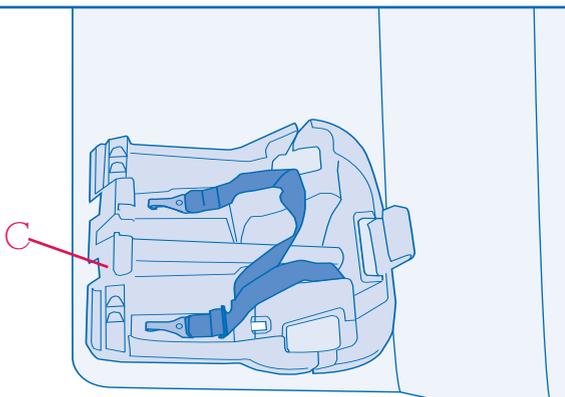


When the LATCH system is not in use, you **MUST** securely store it in the area provided in the base **C**. Fold the harness strap, place it in the middle, and put the hooks in the slots located on each side of the storage area. A loose LATCH harness and hook may injure your child.



Installing the Child Restraint without the Base


1

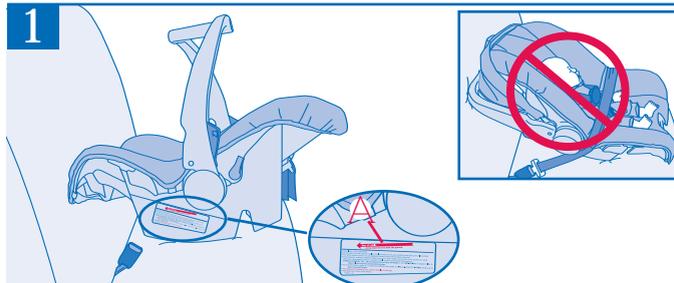

After securing the infant, place the restraint into your vehicle. Adjust the restraint so that the level line **A** is parallel with the vehicle floor.

NOTE: Generally, the center rear seating position is the safest. This infant restraint **MUST** face the rear of the vehicle.


2

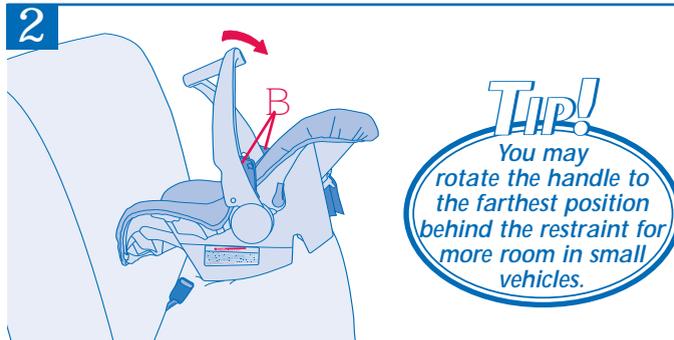



TIP!
You may rotate the handle to the farthest position behind the restraint for more room in small vehicles.

Rotate the handle to the down position by squeezing both handle triggers **B**.


3

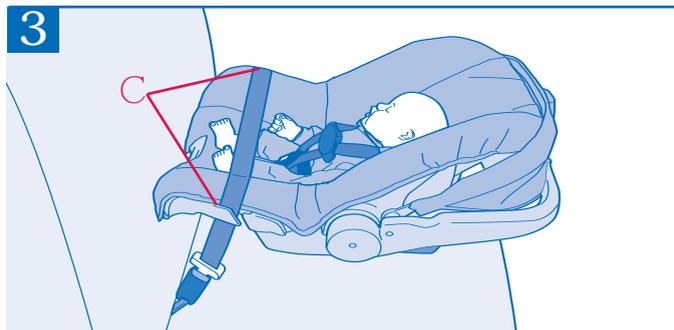

Secure the restraint to your vehicle by routing the vehicle seat belt through the belt slots **C** on the sides of the restraint.

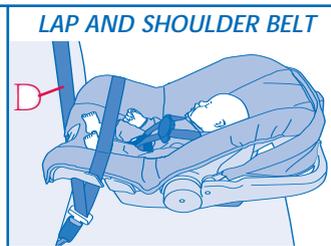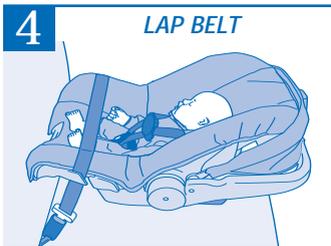


NOTE: In vehicles with a lap and shoulder belt **D** and a free sliding buckle tongue, and emergency locking retractors (ELR) you must install with the locking clip. Unless your vehicle owner's manual provides otherwise. See "Using the Locking Clip" on page 23.

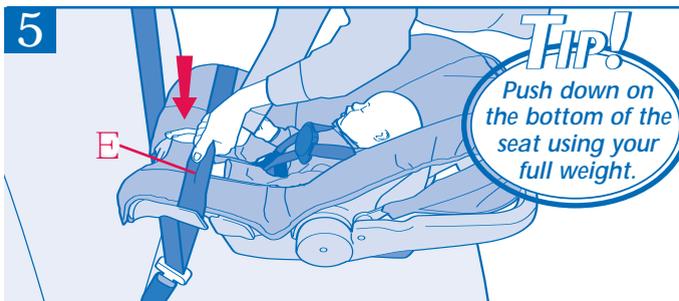

⚠ WARNING

- **NEVER** use this child restraint in the **forward-facing** position.
- **DO NOT** use this child restraint if it moves more than 1 in. (25 mm) forward or side-to-side at the seat belt path. Serious injury or death may occur. Move the child restraint to another seating location, or try to tighten the seat belt again.



The seat belt **E** must be as tight as possible. Put your full weight into the seat as you tighten the seat belt. **If you can move the child restraint more than 1 in. (25 mm) forward or side-to-side at the belt path, the seat belt is not tight enough, and you need to try again.**

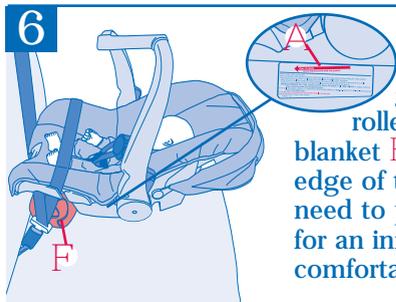


If the level line **A** is not level to the ground, use a tightly rolled towel or small blanket **F** beneath the front edge of the child restraint. You need to provide enough recline for an infant's head to lie back comfortably.

Using the Locking Clip


Use the locking clip with lap/shoulder vehicle seat belts that have a free sliding buckle tongue. See pages 15 – 22 to install this child restraint and its base.

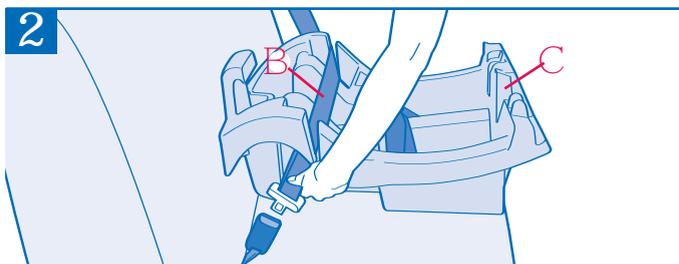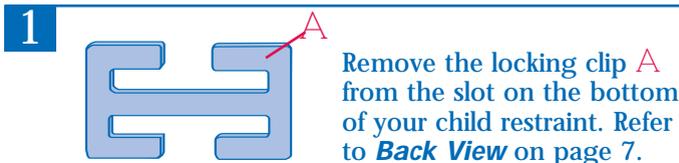

Thread the seat belt **B** through the base **C** (or child restraint) and buckle the seat belt.

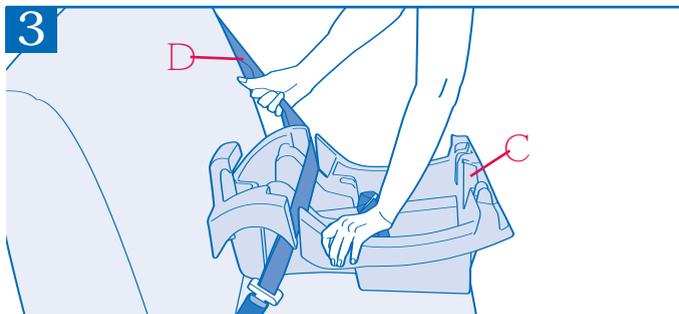


Push down on the base **C** while pulling the shoulder belt **D** tightly to remove all slack from the lap portion of the belt.

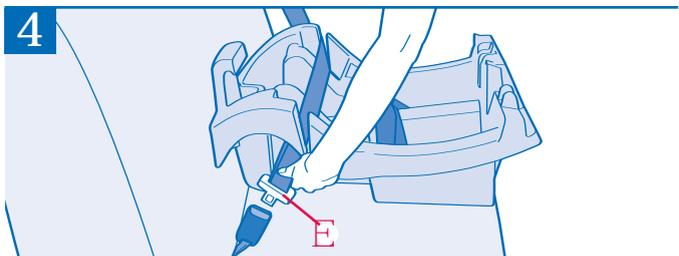

Hold the lap and shoulder belts together just behind the free sliding buckle tongue **E** and unbuckle the seat belt.


5

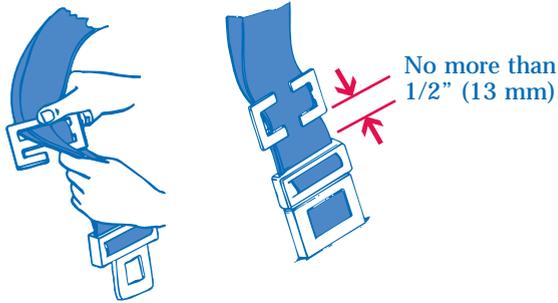

No more than
1/2" (13 mm)

Thread both straps of the seat belt onto the locking clip, and slide into place.

Properly Installed Locking Clip

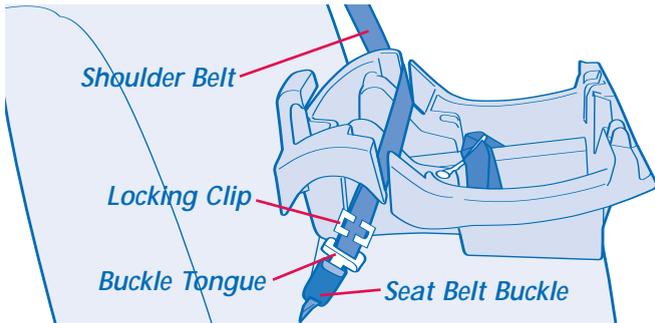

⚠ WARNING


- **DO NOT** use this child restraint if it moves more than 1 in. (25 mm) forward or side-to-side at the belt path. Serious injury or death may occur. Move the child restraint to another location or try to tighten it again.
- Remove locking clip from vehicle seat belt when not used with a child restraint or the vehicle seat belt will not properly restrain an adult or child. Serious injury could occur.

Re-buckle the seat belt, make certain the child restraint is secure, and that all belts are tight.


This child restraint should not move more than 1 in. (25 mm) forward or side-to-side at the belt path. If it does, try to tighten it again or move the child restraint to another location.

Using as an Infant Carrier

1

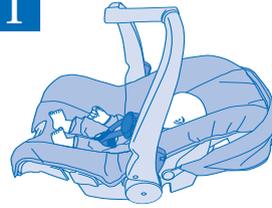


Secure the child in the carrier by following "Securing Your Child in the Child Restraint" on page 13.

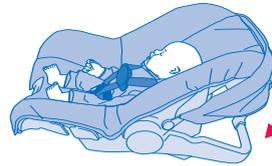

To use as a stand:
Rotate the handle completely back until the handle locks into place and rests on a level surface.

2

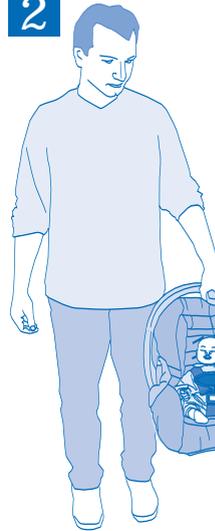

To use as a carrier: Rotate the handle to the up position. Carry at your side by using the handle as shown.

NOTE: Make sure that the handle is firmly locked on both sides and that the harness is securely buckled before lifting the infant carrier.

DO NOT CARRY ON YOUR HIP.




⚠ WARNING

- To prevent an accident or injury to your child, **NEVER** place the child restraint in any position in a shopping cart.
- **NEVER** place this child restraint near the edges of counter tops, tables, or other high surfaces.



The child's movements can cause the child restraint to slide and fall. Be sure that the handle is firmly located in the carry position before lifting the child restraint.

Canopy Installation

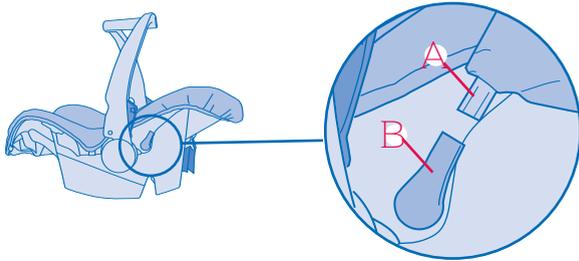


Guide each end of the canopy strip **A** into the canopy holders **B** located on each side of the child restraint.

Care Instructions

- To clean pads slide the plastic clips on the seat pad off of the seat shell.
- Cloth pads and canopies may be machine washed separately – cold water, delicate cycle, tumble dry 10 – 15 minutes, low heat.
- Wipe straps, buckles and harness adjuster with warm damp cloth and mild soap. Air dry.
- To help protect the vehicle upholstery, place a towel beneath and behind the child restraint.

Replacement Parts


To order replacement parts you can order on-line at www.evenflo.com or contact Evenflo at 1-800-233-5921. When you contact us, please have the product model number and date of manufacture (found on the back of the child restraint).



1 Locking Clip




2 Head Foam



3 Canopy



4 Harness System



5 Seat Pad

Proper Disposal of this Child Restraint

At the end of this child restraint's useful life, Evenflo encourages you to dispose of it properly. Most of the components in this child restraint are recyclable.

1. Remove all fabric and padding.
2. Remove all screws and disassemble the restraint.
3. Recycle all plastic/foam parts and discard the rest.

If your local recycling center won't accept the padding, you may dispose of it in the landfill.

NOTE: Evenflo uses recycled materials in the manufacturing process whenever possible but never for components that are critical for safety.

Limited Warranty

For a period of 90 days from the original purchase of this Product, Evenflo warrants to the original end user (“Purchaser”) this Product (including any accessories) against defects in material or workmanship. Evenflo’s sole obligation under this express limited warranty shall be, at Evenflo’s option, to repair or replace any Product that is determined to be defective by Evenflo and determined to be covered by this warranty.

Repair or replacement as provided under this warranty is the exclusive remedy of the Purchaser. Proof of purchase in the form of a receipted invoice or bill of sale evidencing that the Product is within the warranty period must be presented to obtain warranty service. This express limited warranty is extended by Evenflo ONLY to the original Purchaser of the Product and is not assignable or transferable to subsequent purchasers or end users of the Product. For warranty service, contact Evenflo’s ParentLink Consumer Resource Center at (800) 233-5921 or www.evenflo.com.

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS HEREBY DISCLAIMED. EVENFLO SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL OR PUNITIVE DAMAGES OF ANY KIND FOR BREACH OF THE EXPRESS LIMITED WARRANTY ON THIS PRODUCT, OR ANY WARRANTY IMPLIED BY OPERATION OF LAW. OTHER THAN THE EXPRESS LIMITED WARRANTY SET FORTH ABOVE, THERE ARE NO OTHER WARRANTIES THAT ACCOMPANY THIS PRODUCT AND ANY ORAL, WRITTEN OR ANY OTHER EXPRESS REPRESENTATION OF ANY KIND IS HEREBY DISCLAIMED.



Answers. Advice. Affirmation.™

- www.evenflo.com
- USA: 1-800-233-5921 8 AM – 5 PM EST
- Mexico: 01-800-706-12-00



Answers. Advice. Affirmation.™

- www.evenflo.com
- USA: 1-800-233-5921 8 AM – 5 PM EST
- Mexico: 01-800-706-12-00